


FIXTURE DIAGRAM

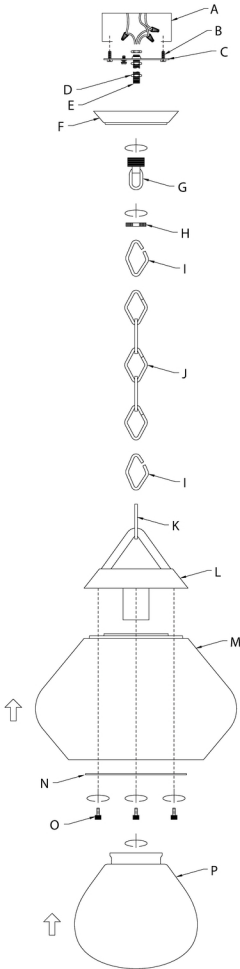

PARTS LIST

- | | | |
|--------------------------------------|--------------------------------|----------------------------------|
| [A] Outlet Box (Not Supplied) | [E] Threaded Pipe | [K] Decorative Loop |
| [B] Strap Mounting Screw | [F] Canopy | [L] Socket Base Cup |
| [C] Mounting Strap | [G] Screw Collar Loop | [M] Large Glass Shade |
| [D] Hex Nut (3) | [H] Threaded Ring | [N] Plate |
| | [I] Open Chain Link (2) | [O] Decorative Screws (3) |
| | [J] Chain | [P] Small Glass Shade |

CAUTIONS

CAUTION – RISK OF SHOCK:
 Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

WARNING:

- This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended. Failure to adhere to these codes and instructions may result in serious injury and/or property damage and will void the warranty.

CLEANING:

- Always be certain that electric current is turned off before cleaning.
- Only a soft damp cloth should be used. Harsh cleaning products may damage the finish.


INSTALLATION INSTRUCTIONS

- Turn the decorative screws **[O]** (counterclockwise) to remove decorative screws and plate **[N]** from socket base cup **[L]**. Retain decorative screws and plate.
 - Carefully slip the small opening in large glass shade **[M]** over socket, and fully seat large glass shade in socket base cup.
 - Carefully slip plate **[N]** over socket, and fully seat plate against the inside surface of large glass shade.
 - Align the three (3) small holes in plate, large glass shade, and socket base cup. Screw the decorative screws **[O]** into the aligned holes until decorative screws are snug against plate, plate is snug against the inside surface of large glass shade, and large glass shade is snug in socket base cup to secure plate and glass shade to socket base cup. **DO NOT OVER-TIGHTEN.**
 - Screw threaded pipe **[E]** into screw collar loop **[G]** a minimum of 6 mm (1/4").
 - Lock screw collar loop into place with a hex nut **[D]**.
 - Run a second hex nut down threaded pipe almost touching first hex nut.
 - Screw threaded pipe **[E]** into mounting strap **[C]**.
- NOTE:** Mounting strap must be positioned with extruded thread facing into outlet box. Threaded pipe must protrude out the back of mounting strap.
- Screw a third hex nut onto end of threaded pipe protruding from back of mounting strap.
 - Snatch mounting strap to outlet box **[A]** (not supplied) using strap mounting screws **[B]**.
 - Unscrew the threaded ring **[H]** from screw collar loop. Take canopy **[F]** and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning assembly up or down in mounting strap. Remove canopy.
 - After desired position is found, tighten both top and bottom hex nuts up against the bottom and top of the mounting strap.
 - Slip canopy over screw collar loop and screw on threaded ring.
 - Determine desired length of chain **[J]**. To shorten chain, carefully open and remove chain links as needed.
- NOTE:** To open a chain link, locate the split in the chain link. Put one pair of pliers (not included) on each side of the split and rotate the pliers in opposite directions to open the link's split. The open link should be shaped like the letter "C". Do not twist the ends of the link sideways so that the open link cannot lay flat.
- Attach one end of chain **[J]** to bottom of screw collar loop using an open chain link **[I]**. Attach opposite end of chain to decorative loop **[K]** using an open chain link.
- NOTE:** Once an open link is attached to a loop, close the open link by placing a piece of cloth over the open link and using a pair of pliers to gently squeeze the link closed.
- Unscrew threaded ring, let canopy and threaded ring slip down.
 - Weave fixture wires through chain links (no more than 3 inches apart), and pass through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.

Grounding instructions: (See illus. a or b)

- On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
- On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.

If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector after following the above steps. Never connect ground wire to black or white power supply wires.



- Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wire (SPT 1 & SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)

- Raise canopy to ceiling and secure canopy in place by tightening threaded ring **[H]** onto screw collar loop **[G]**.
NOTE: Make sure wires do not get pinched between mounting strap and canopy or canopy and ceiling.
- Insert recommended bulb (not supplied).
- While holding socket base cup in place, carefully pass small glass shade **[P]** over the installed bulb and rotate into the fixture (clockwise) until snug. **DO NOT OVER-TIGHTEN.**