
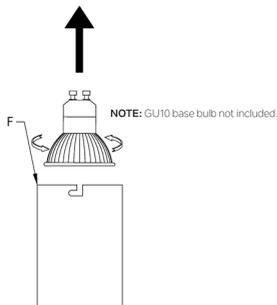


## FIXTURE DIAGRAM

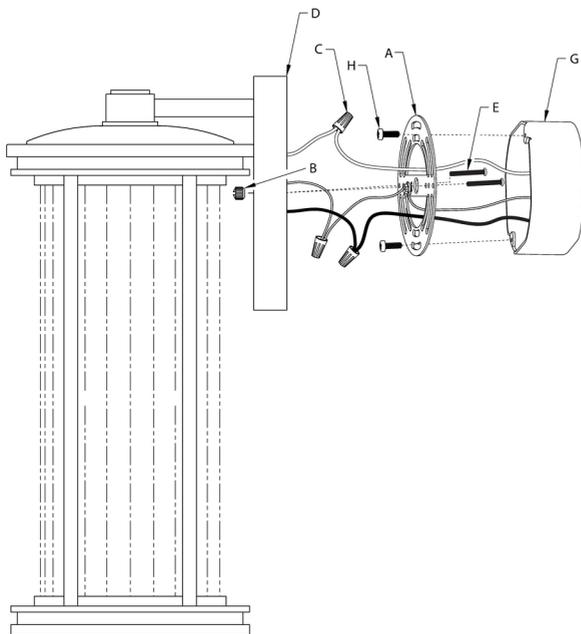

NOTE: Product images may vary slightly from actual product.

## PARTS LIST

<b>[A]</b> Mounting Strap	<b>[D]</b> Canopy	<b>[G]</b> Outlet Box (not supplied)
<b>[B]</b> Lockup Knob (2)	<b>[E]</b> Mounting Screw (2)	<b>[H]</b> Strap Mounting Screw (2)
<b>[C]</b> Wire Connector (3)	<b>[F]</b> Bulb Cover	

## CAUTIONS

**CAUTION – RISK OF SHOCK:** Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

### WARNING:

1. This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended. Failure to adhere to these codes and instructions may result in serious injury and/or property damage and will void the warranty.

### INSTRUCTIONS FOR MOUNTING FIXTURE OUTDOORS AND/OR IN WET LOCATIONS:

- 1) Mounting surface should be clean, dry, flat and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
- 2) With silicone caulking compound, caulk completely around where back of canopy meets the wall surface to prevent water from seeping into outlet box.


### CLEANING:

- Always be certain that electric current is turned off before cleaning.
- Only a soft damp cloth should be used. Harsh cleaning products may damage the finish.

## INSTALLATION INSTRUCTIONS

1. Find the appropriate threaded holes on mounting strap **[A]** that align with hole distance in canopy **[D]**. Thread mounting screws **[E]** into threaded holes starting from outlet box **[G]** side.
2. Attach mounting strap to outlet box using the strap mounting screws **[H]**. Mounting strap can be adjusted to suit position of fixture.
3. Grounding instructions: (See illus. a or b).
  - a. On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
  - b. On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.


If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with a wire connector **[C]** (included) after following the above steps. Never connect ground wire to black or white power supply wires.

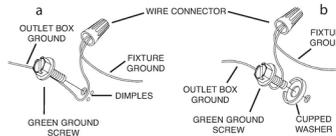

4. Make wire connections with wire connectors **[C]** (included). Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wire (SPT 1 & SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)



5. **NOTE: Fixture should be installed with the socket facing DOWN.** Push fixture to wall, carefully aligning mounting screws protruding from the mounting strap with holes in canopy.
 

**NOTE:** Make sure all wires are inside canopy and do not get pinched between mounting strap and canopy or wall and canopy of fixture.
6. Screw lockup knobs **[B]** onto threads protruding through holes in canopy (2 places) and tighten to secure fixture to wall.
7. Insert recommended GU10 base bulb (not included) by carefully pushing it up into socket and rotating it (clockwise) into place to secure. **DO NOT OVER-TIGHTEN.**
8. Carefully raise bulb cover **[F]** up over bulb and socket until fully seated against the socket base cap, then rotate it (clockwise) into place to secure. **DO NOT OVER-TIGHTEN.**