


FIXTURE DIAGRAM

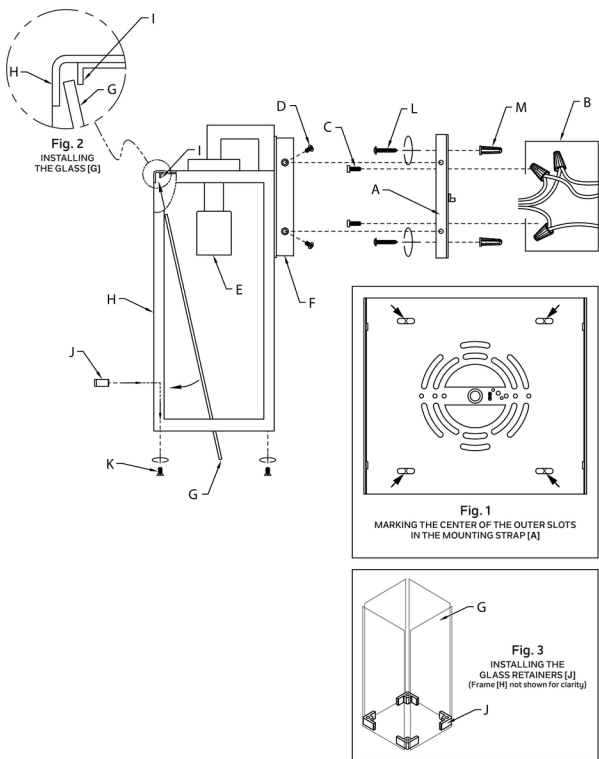


INSTALLATION INSTRUCTIONS

- Attach mounting strap [A] to outlet box [B] using the strap mounting screws [C]. Mounting strap can be adjusted to suit position of fixture.

NOTE: Mounting strap should be installed with the bent tabs at the outer edge of the mounting strap pointing away from the wall, at the 9 and 3 o'clock position as shown.
- Using the mounting strap as a template, mark the center of the four (4) outer slots in the mounting strap as shown (Fig. 1).
- Carefully remove strap mounting screws [C] and mounting strap [A] from outlet box.
- Drill 1/8" (3.2mm) holes in the mounting surface at the positions that were marked in Step 3. Insert a wall anchor [M] into each hole, and lightly tap wall anchor into mounting surface until flush.
- Reattach mounting strap [A] to outlet box [B] using the strap mounting screws [C].
- Secure mounting strap to wall anchors with four (4) wall anchor screws [L].
- Grounding instructions: (See illus. a or b).
 - On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
 - On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.

If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector after following the above steps. Never connect ground wire to black or white power supply wires.



- Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wire (SPT 1 & SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)



- NOTE: Fixture should be installed with socket [E] facing DOWN as shown.**

Push canopy [F] to wall, carefully aligning the mounting screw holes in left and right side of mounting strap with the mounting screw holes in left and right side of canopy.

NOTE: Make sure all wires are inside canopy and do not get pinched between mounting strap and canopy or wall and canopy of fixture.
- Screw four (4) mounting screws [D] into holes in canopy and mounting strap to attach fixture to wall. Two on the left side and two on the right side of canopy. Tighten to secure.
- Take the glass panels with the three (3) EVA pad side pointing up and carefully raise glass [G] up through the bottom of frame [H]. Insert top edge of glass between frame [H] and tab [I] (Fig. 2), tilt glass against frame until vertical, and seat glass on inside of frame. Repeat for remaining glass.
- Place one glass retainer [J] at each inside bottom corner of the frame, against the glass (Fig. 3). Align holes in glass retainers with holes in bottom of frame; insert retainer screws [K] into holes in bottom of frame, and thread retainer screws into glass retainers. Tighten to secure.

NOTE: Glass should be positioned between frame and glass retainers.
- Insert recommended bulb(s) (not included).

PARTS LIST

- | | | |
|-------------------------------|---------------|---------------------------|
| [A] Mounting Strap | [F] Canopy | [J] Glass Retainer (4) |
| [B] Outlet Box (not supplied) | [G] Glass (4) | [K] Retainer Screw (4) |
| [C] Strap Mounting Screw (2) | [H] Frame | [L] Wall Anchor Screw (4) |
| [D] Mounting Screw (4) | [I] Tab (4) | [M] Wall Anchor (4) |
| [E] Socket | | |

CAUTIONS

CAUTION – RISK OF SHOCK:
Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

WARNING:
1. This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended. Failure to adhere to these codes and instructions may result in serious injury and/or property damage and will void the warranty.

INSTRUCTIONS FOR MOUNTING FIXTURE OUTDOORS

- AND/OR IN WET LOCATIONS:**
- Mounting surface should be clean, dry, flat and 1/4" larger than the canopy on all sides. Any gaps between the mounting surface and canopy exceeding 3/16" should be corrected as required.
 - With silicone caulking compound, caulk completely around where back of canopy meets the wall surface to prevent water from seeping into outlet box.

CLEANING:

- Always be certain that electric current is turned off before cleaning.
- Only a soft damp cloth should be used. Harsh cleaning products may damage the finish.