


## FIXTURE DIAGRAM

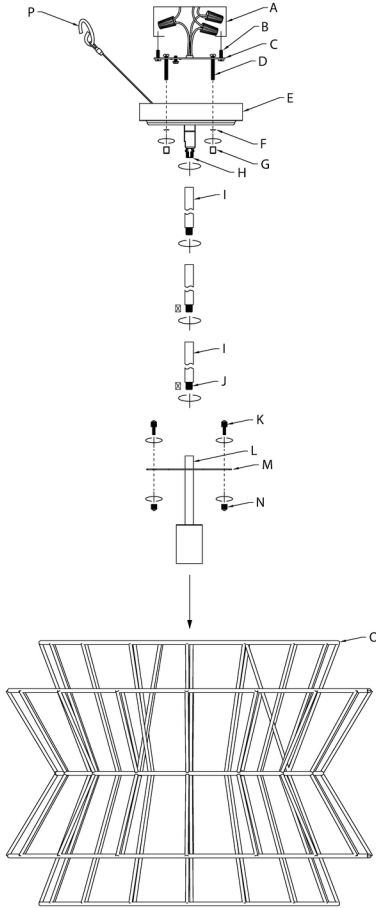

NOTE: Product images may vary slightly from actual product.

## PARTS LIST

<b>[A]</b> Outlet Box (not supplied)	<b>[H]</b> Swivel (Attached to Canopy)	<b>[M]</b> Socket Assembly
<b>[B]</b> Strap Mounting Screw (2)	<b>[I]</b> Stems (2-12", 2-6" with Short Threaded Tubes [J] Installed)	<b>[N]</b> Shade Lock-up Knob (3)
<b>[C]</b> Mounting Strap	<b>[J]</b> Short Threaded Tubes	<b>[O]</b> Shade (attached to Canopy)
<b>[D]</b> Mounting Screw (2)	<b>[K]</b> Studded Shade	<b>[P]</b> Inspection Cable
<b>[E]</b> Canopy	<b>[L]</b> Coupling	
<b>[F]</b> Lock Washer (2)		
<b>[G]</b> Knob (2)		

## CAUTIONS

**CAUTION – RISK OF SHOCK:**  
Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

### WARNING:

- This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended. Failure to adhere to these codes and instructions may result in serious injury and/or property damage and will void the warranty.

### CLEANING:


- Always be certain that electric current is turned off before cleaning.
- Only a soft damp cloth should be used. Harsh cleaning products may damage the finish.

## INSTALLATION INSTRUCTIONS

**NOTE: Thread locking compound must be applied to threads as noted with ( ) symbol to prevent accidental rotation of fixture during cleaning, relamping, etc.**

- Lower socket assembly [M] down through the top of shade [O], then raise socket assembly up so that the tabs on shade are seated on top of the tabs on socket assembly. Align the holes in the shade tabs with the holes in the socket assembly tabs. Thread studded shade mounting screws [K] down into the aligned holes and tighten to attach shade to socket assembly (See Fig 1).
- Below the tabs, thread shade lock-up knobs [N] onto the threads of studded shade mounting screws. Tighten to secure.
- Pass fixture wires from coupling [L] through desired number of short threaded tubes [J] and stems [I]. Screw stems together using short threaded tubes.
- Pass fixture wires from last stem through end of swivel [H] and into canopy [E]. Thread the end of swivel into end of last stem. Note direction of swivel in accordance with ceiling.
- Cut fixture wires a MINIMUM of 20 inches from the top edge of canopy.
- Find the appropriate threaded holes on mounting strap [C] that align with hole distance in canopy. Assemble mounting screws [D] into threaded holes starting from the outlet box side.
- Attach mounting strap to outlet box [A] (not supplied) using the supplied strap mounting screws [B]. Mounting strap can be adjusted to suit position of fixture.
- Attach the inspection cable [P] to the mounting strap or to the inside of the outlet box and secure into place to prevent damage to the wires during wiring.
- Grounding instructions: (See illus. a or b)
  - On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
  - On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.


If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector after following the above steps. Never connect ground wire to black or white power supply wires.



- Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor
<p>*Note: When parallel wire (SPT 1 &amp; SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)</p>	
<p>Neutral Wire</p>	

- Raise canopy to ceiling, carefully passing mounting screws through mounting screw holes in canopy.
- NOTE:** Be certain wires do not get pinched between mounting strap and canopy or canopy and ceiling while holding.
- While holding canopy in place, use lock washers [F] and knobs [G] to secure canopy. Tighten to secure.
- Insert recommended LED bulb(s) (not supplied).



**NOTE: FIXTURE SHOULD BE INSTALLED WITH TABS OF SHADE ABOVE TABS OF SOCKET ASSEMBLY**

**Fig. 1**  
**OVERHEAD VIEW:**  
**ATTACHING SHADE TO SOCKET ASSEMBLY**