


FIXTURE DIAGRAM

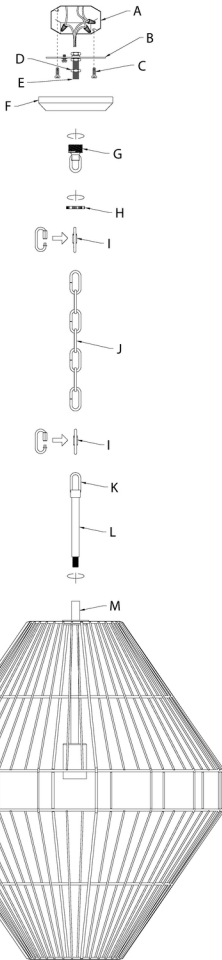

NOTE: Product images may vary slightly from actual product.

PARTS LIST

[A] Outlet Box (not supplied)	[D] Hex Nut (3)	[I] Locking Chain Link (2)
[B] Mounting Strap	[E] Threaded Pipe	[J] Chain
[C] Strap Mounting Screw (2)	[F] Canopy	[K] Decorative Loop
	[G] Screw Collar Loop	[L] Decorative Tube
	[H] Threaded Ring	[M] Shade

CAUTIONS

CAUTION – RISK OF SHOCK:
 Disconnect Power at the main circuit breaker panel or main fusebox before starting and during the installation.

WARNING:

- This fixture is intended for installation in accordance with the National Electrical Code (NEC) and all local code specifications. If you are not familiar with code requirements, installation by a certified electrician is recommended. Failure to adhere to these codes and instructions may result in serious injury and/or property damage and will void the warranty.


CLEANING:

- Always be certain that electric current is turned off before cleaning.
- Only a soft damp cloth should be used. Harsh cleaning products may damage the finish.

INSTALLATION INSTRUCTIONS

- Screw threaded pipe **[E]** into screw collar loop **[G]** a minimum of 6 mm (1/4").
- Lock screw collar loop into place with a hex nut **[D]**.
- Run a second hex nut down threaded pipe almost touching first hex nut.
- Screw threaded pipe **[E]** into mounting strap **[B]**.
NOTE: Mounting strap must be positioned with extruded threading facing into outlet box **[A]**.
NOTE: Threaded pipe must protrude through the top of the mounting strap enough so that a third hex nut can be fully threaded onto the threaded pipe.
- Screw a third hex nut onto the end of threaded pipe protruding from the back of mounting strap.
- Connect mounting strap to outlet box using strap mounting screws **[C]**.
- Unscrew threaded ring **[H]** from screw collar loop. Take canopy **[F]** and pass over screw collar loop. Approximately one half of the screw collar loop exterior threads should be exposed. Adjust screw collar loop by turning threaded pipe up or down in mounting strap. Remove canopy.
- After desired position is found, tighten the two (2) upper hex nuts in the mounting strap assembly (one (1) on each side of mounting strap) against the top and bottom of mounting strap.
- Slip canopy over screw collar loop and screw on threaded ring.
- Pass fixture wires through decorative tube **[L]** and decorative loop **[K]**. Thread decorative tube into coupling on shade **[M]**. Tighten to secure.
- Determine desired length of chain **[J]**. To shorten chain, carefully open and remove chain links as needed.
NOTE: To open a chain link, locate the split in the chain link. Put one pair of pliers (not included) on each side of the split and rotate the pliers in opposite directions to open the split in the link.
NOTE: The open link should be shaped like the letter "C". Do not twist the ends of the link sideways so that the open link cannot lay flat.
- Attach one end of chain **[J]** to bottom of screw collar loop using a locking chain link **[I]**. Attach opposite end of chain to decorative loop using a locking chain link.
NOTE: Locking chain links can be opened and closed by threading the nut on and off of the link end.
- Unscrew threaded ring, let canopy and threaded ring slip down.
- Weave fixture wires through chain links (no more than 3 inches apart), and pass through threaded ring, canopy, screw collar loop, threaded pipe and into outlet box.
- Grounding instructions: (See illus. a or b).
 - On fixtures where mounting strap is provided with a hole and two raised dimples, wrap ground wire from outlet box around green ground screw, and thread into hole.
 - On fixtures where a cupped washer is provided, attach ground wire from outlet box under cupped washer and green ground screw, and thread into mounting strap.

If fixture is provided with ground wire, connect fixture ground wire to outlet box ground wire with wire connector after following the above steps. Never connect ground wire to black or white power supply wires.



- Make wire connections. Reference chart below for correct connections and wire accordingly.

Connect Black or Red Supply Wire to:	Connect White Supply Wire to:
Black	White
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without Tracer	Clear, Brown, Gold or Black with Tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

*Note: When parallel wire (SPT 1 & SPT 2) are used. The neutral wire is square shaped or ridged and the other wire will be round in shape or smooth (See illus.)



- Raise canopy to ceiling and secure canopy in place by tightening threaded ring **[H]** onto screw collar loop **[G]**.
NOTE: Make sure wires do not get pinched between mounting strap and canopy or canopy and ceiling.
- Insert recommended bulb(s) (not supplied).