


CHOOSE YOUR MORTAR


FEATURES & BENEFITS




RECOMMENDED SURFACE

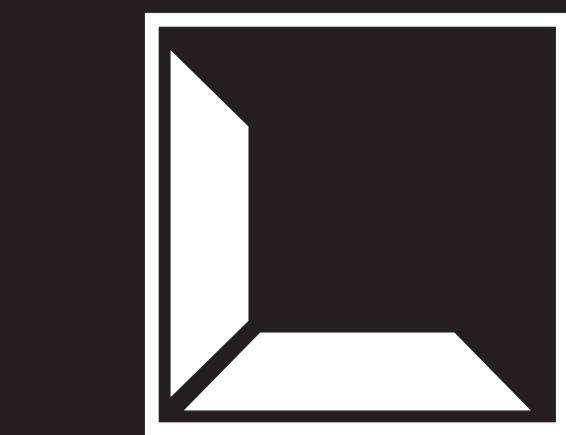


TIME BEFORE GROUTING

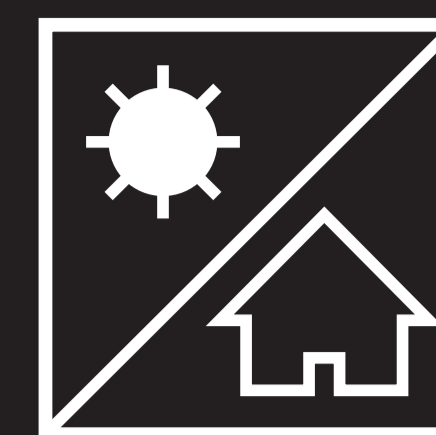

WHERE TO USE

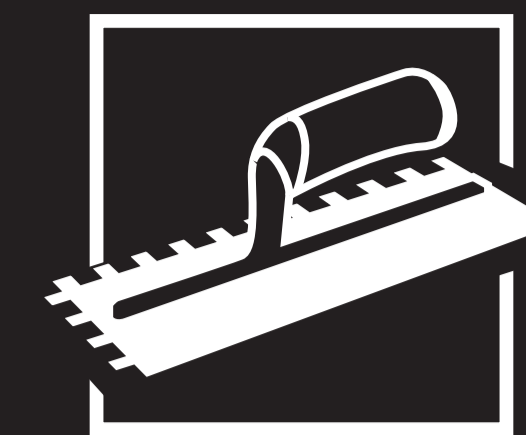

EASY TO SPREAD

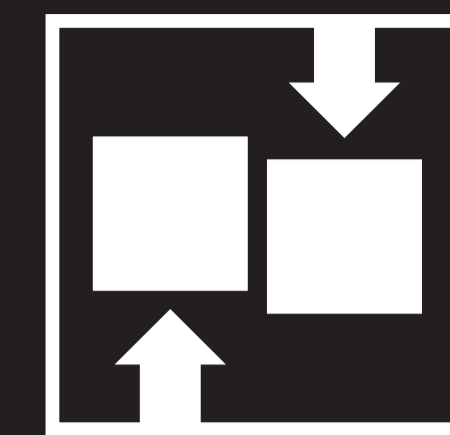

BOND STRENGTH**



WARRANTY†

LARGE AND HEAVY MORTAR FOR TILE & STONE (Tiles 15" or Larger on One Side)

Brand	Mortar Name	Recommended Surface	Time Before Grouting	Where to Use	Easy to Spread	Bond Strength**	Warranty†
LATICRETE	MULTIMAX LITE	WALL NON-SAG FLOOR NON-SLUMP	24 Hrs.	Interior/Exterior Residential/Commercial Pool/Shower	✓	500 - 600 PSI ANSI A118.15	LIFETIME LIMITED RESIDENTIAL 25 YEAR LIMITED COMMERCIAL
MAPEI	ULTRAFLEX LFT	WALL NON-SAG FLOOR NON-SLUMP	8 - 16 Hrs. (WALLS) 24 Hrs. (FLOORS)	Interior/Exterior Residential/Commercial Pool/Shower		465- 625 PSI ANSI A118.15	LIFETIME LIMITED RESIDENTIAL & COMMERCIAL
MAPEI	ULTRALITE	WALL NON-SAG FLOOR NON-SLUMP	8 - 16 Hrs. (WALLS) 24-48 Hrs. (FLOORS)	Interior/Exterior Residential/Commercial Shower	✓	450- 550 PSI ANSI A118.15	LIFETIME LIMITED RESIDENTIAL & COMMERCIAL
LATICRETE	TRI-LITE	WALL NON-SAG FLOOR NON-SLUMP	24 Hrs.	Interior/Exterior Residential/Commercial Shower	✓	420- 470 PSI ANSI A118.15	25 YEAR LIMITED RESIDENTIAL & COMMERCIAL
MAPEI	KERAFLEX PLUS	WALL NON-SAG FLOOR NON-SLUMP	8 - 16 Hrs. (WALLS) 24 Hrs. (FLOORS)	Interior/Exterior Residential/Commercial Shower	✓	220- 340 PSI ANSI A118.4	25 YEAR LIMITED RESIDENTIAL & COMMERCIAL
LATICRETE	4-XLT	WALL NON-SAG FLOOR NON-SLUMP	24 Hrs.	Interior/Exterior Residential/Commercial Shower		500 PSI ANSI A118.15	10 YEAR LIMITED RESIDENTIAL & COMMERCIAL
MAPEI	KERAFLEX SG	WALL NON-SAG FLOOR NON-SLUMP	24 Hrs.	Interior/Exterior Residential/Commercial Shower	✓	200- 300 PSI ANSI A118.4	10 YEAR LIMITED RESIDENTIAL & COMMERCIAL
MAPEI	ULTRAFLEX LHT SG	WALL NON-SAG FLOOR NON-SLUMP	8 - 16 Hrs. (WALLS) 24 Hrs. (FLOORS)	Interior/Exterior Residential/Commercial Shower		255- 315 PSI ANSI A118.4	10 YEAR LIMITED RESIDENTIAL & COMMERCIAL
LATICRETE	LHT PLUS	WALL FLOOR NON-SLUMP	24 Hrs.	Interior/Exterior Residential/Commercial Shower		300 - 400 PSI ANSI A118.4	5 YEAR LIMITED RESIDENTIAL & COMMERCIAL
LATICRETE	LHT	FLOOR NON-SLUMP	24 Hrs.	Interior/Exterior Residential/Commercial Shower		300 - 400 PSI ANSI A118.4	5 YEAR LIMITED RESIDENTIAL & COMMERCIAL


THINSET MORTAR FOR TILE & STONE

LATICRETE	257 TITANIUM	WALL FLOOR	24 Hrs.	Interior/Exterior Residential/Commercial Pool/Shower	✓	475 - 575 PSI ANSI A118.15	LIFETIME LIMITED RESIDENTIAL 25 YEAR LIMITED COMMERCIAL
LATICRETE	254 PLATINUM	WALL FLOOR	24 Hrs.	Interior/Exterior Residential/Commercial Pool/Shower		475 - 575 PSI ANSI A118.15	LIFETIME LIMITED RESIDENTIAL 25 YEAR LIMITED COMMERCIAL
Schluter Systems	ALL SET	WALL NON-SAG FLOOR	12 Hrs.	Interior/Exterior Residential/Commercial Shower		>400 PSI ANSI A118.15	LIFETIME LIMITED RESIDENTIAL & COMMERCIAL
LATICRETE	253 GOLD	WALL FLOOR	24 Hrs.	Interior/Exterior Residential/Commercial Shower		350 - 450 PSI ANSI A118.4	10 YEAR LIMITED RESIDENTIAL & COMMERCIAL

RECOMMENDED TROWEL NOTCH

Always check adhesive/mortar manufacturer's recommendation before selecting trowel notch.


6" x 6" or smaller (Mosaics)

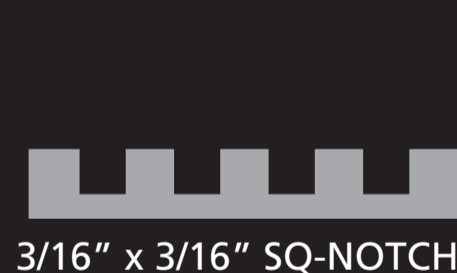


8" x 8" or smaller




6" x 6" up to 12" x 12" Use with Sheet Waterproofing Membranes

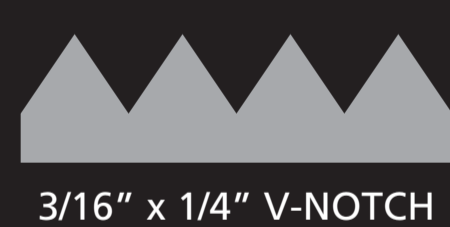

8" x 8" up to 16" x 16"

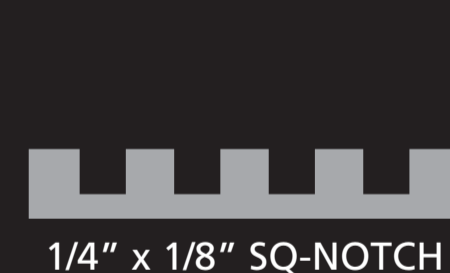

12" x 12" and larger

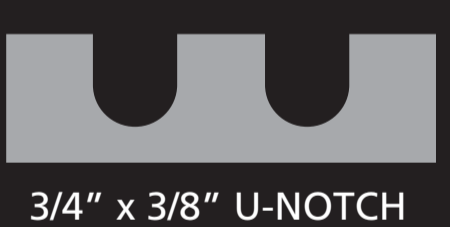

15" x 15" and larger Rubi Trowel for Large Format Tiles



* Apply a small test area to determine results before grouting entire installation.

** Tested and meets ANSI A118.15 shear strength, impervious ceramic (porcelain) mosaics and tiles or A118.4 Porcelain Tile Shear Strength. ANSI A118.4 is the national standard for shear strength of modified dry-set. ANSI A118.15 is the national standard for shear strength of improved and high-performance modified mortar. All Mortars listed above are suitable for interior and exterior use.

† Warranty coverage is limited based on system use and may vary when product is used by itself. For more information about warranties and registration requirements, visit flooranddecor.com. Use only as a reference. Always refer to the manufacturer's Technical Data Sheet for more specific information.